


ROCKER SWITCHES



DIMENSIONS

Unless otherwise specified, a tolerance of $\pm 0.4\text{mm}$ applies to all dimensions.

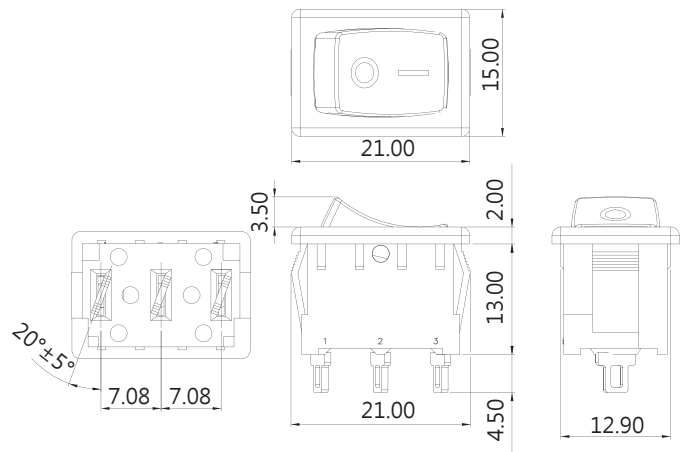

RE SERIES

SPECIFICATIONS

Contact Resistance (initial)

Max. 50 m Ω

Measured by ohm meter - open voltage < 1VDC, driver current -100 mA

Insulation Resistance (at 500 VDC / minute)

Min. 100 M Ω

Dielectric Strength

Min. 1,000VAC(50-60HZ)/minute between Live parts.

Min. 3,000VAC(50-60HZ)/minute between Live parts and dead metal parts

Operating Temperature Range

-40°C to 55°C (with no icing)

Vibration

10~55 Hz, displacement 0.75 mm(p-p)

Electrical Service Life


Min. 10,000 operations

Electrical Operating Frequency


10~30 operations per minute

CONTACT CONFIGURATION

SPDT



SPST





TERMINAL TYPES

MOUNTING HOLES

t=0.8mm

t=1.0mm

t=1.2mm





APPLICATIONS

Juice Maker, Blender, Food Processor

TERMINAL TYPES

A TYPE (t=0.8mm)

D TYPE (t=0.8mm)



CERTIFICATE INFORMATION

Model Name	UL, cUL	ENEC
RE-06S	3A 250 VAC 6A 125 VAC (Temp:55°C) Min. 6,000 operations	Non
RE-12S	12A 125/250 VAC (Temp:55°C) Min. 6,000 operations	12A 125/250VAC μ T85/55 1E4

ORDERING INFORMATION

SERIES PREFIX	RATING CURRENT	OPERATING FORCE	TERMINAL TYPE	TYPE	ACTUATOR COLOR	CIRCUIT ARRANGEMENT	ACTUATOR MARKING	ROHS CODE
RE	06 6A 125VAC	S Max. 700gf	A D 187 series	2 Twist	B BLACK	A SPST B SPDT	0 1 I, O 2 • 3 L, H 4 I, ⊕ 5 ON, OFF 6 -, O	Z