



Honeywell Hawk™ Resolvers

1-Inch Series, Fully-Housed Configuration

DESCRIPTION

Resolvers convert mechanical shaft position to an electrical signal which represents the actual shaft angle. They are variable transformers in which the stator has two phase windings mechanically displaced by 90°. The output consists of two sine waves that are phase shifted by 90°. They provide non-contact measurement for 360° sensing, enhanced accuracy, resolution, and repeatability under severe environmental conditions.

Resolvers are generally chosen over electronic sensors (i.e., optical encoders, potentiometers, magnetic encoders/sensors) because they do not use electronics, so they are not susceptible to performance fluctuations in harsh environments. Resolvers are inherently radiation hardened and offer durable EMC (Electromagnetic Compatibility) performance.

Honeywell's Hawk™ 1-Inch Series Resolvers are durable, reliable, non-contact, absolute position sensors with an operating temperature range from -50.8 °C to 93.3 °C [-60 °F to 200 °F] that allows for potential use in defense and aerospace applications.

Manufacturing Process Reduces Lead Time and Allows Customization

Honeywell uses the same components for all standard configurations of its Hawk™ 1-Inch Series Resolvers, increasing production speed and reducing lead time. This results in Honeywell's ability to manufacture production-quality standard devices up to 1.5 times faster than many of its competitors (8 weeks versus 20-22 weeks).

Additionally, Honeywell's manufacturing process and the variety of product features allow customers to customize the resolver to meet their specific application accuracy and size requirements.

Global Support and Engineering Expertise

Honeywell's global presence offers customers timely product and application support. Many resolver competitors offer support only in their local manufacturing area, or limited support outside of their manufacturing area.

With over 30 years of experience providing accurate, reliable, and durable resolvers for the aerospace and defense industries, Honeywell is your one-stop, full-service, globally-competitive answer to your resolver needs.

Options

- Custom trim designed to allow tighter accuracy (upon request)
- Connections include custom lead wire, cable, connector on unit or connector on cable
- Custom redundant brushless version (two independent resolvers within the same housing) to provide reliable back-up/fail-safe in critical applications
- Titanium housing provides enhanced durability and enhanced resistance to corrosion; lightweight
- Transformer for 360°+ rotation (continuous)

Honeywell Hawk™ Resolvers

VALUE PROPOSITIONS (★ = competitive differentiator)

- ★ **Shock** specification of 50 g, 11 ms allows for use in harsh military and aerospace applications
- ★ **Vibration** specification of 15 g, 10 Hz to 2000 Hz allows for use in harsh military and aerospace applications
- ★ **Enhanced reliability and durability** when compared with potentiometers due to the Hawk™ Resolvers' ability to resolve an absolute angle using magnetic principles so that performance is not impacted by media (i.e., sand, dust, water), its ability to operate in many harsh environments, its non-contact design, the lack of electronics, and the use of space-qualified materials
- ★ **Operating temperature range** of -50.8 °C to 93.3 °C [-60 °F to 200 °F] allows for use in harsh environments and meets standard military and space application requirements
- ★ **Excitation voltage range** of 2 V to 15 V allows customers to standardize on a resolver that meets their excitation voltage needs, simplifying sourcing and delivery, and saving time
- ★ **Product delivery up to 1.5 times faster** than many competitive products due to Honeywell's use of the same components for all standard configurations of Hawk™ Resolvers, increasing production speed and reducing lead time. This results in Honeywell's ability to manufacture production-quality standard devices up to 1.5 times faster than many of its competitors (8 weeks vs. 20-22 weeks)
- ★ **Customization** due to Honeywell's manufacturing process and the variety of features that allow customers to customize Hawk™ Resolvers to meet their application accuracy/size requirements
- ★ **Global support** due to Honeywell's worldwide presence which offers customers immediate product and application support; many resolver competitors offer either support only in their local manufacturing area, or limited support outside of their manufacturing area
- ★ **Engineering expertise** due to Honeywell's 30+ years' experience providing accurate, reliable, and durable resolvers for the aerospace and defense industries

FEATURES AND BENEFITS (in addition to value propositions)

- **Fully housed configuration** with bearing/shaft
- **Small outer diameter** of 1 inch allows for use in size-restricted applications

- **Single speed operation** (1 magnetic pole pair) allows for cost-effective angle resolution over a 360°+ range
- **Excitation frequency range** of 2000 Hz to 5000 Hz provides a wide variety of choices with which to power the device
- **Transformation ratio** of 0.45 or 1.0 offers customers two choices, increasing flexibility within the application
- **Accuracy** of ±7 arcmin enables precise motion control of weapon systems and space positioning devices
- **Non-contact magnetic technology** eliminates mechanical contact, reducing wear and improving reliability and durability by enhancing operation in harsh environments (performance is not affected by sand, dust or water)
- **Meets multiple military/aerospace specifications:** DO-160D, MIL-STD-202G, MIL-STD-810G, MIL-STD-81963B, MIL-STD-461F; complies with space outgassing requirement SP-R0022

POTENTIAL APPLICATIONS

Defense

- **Electro-optical systems** (i.e., systems that transfer information from the optical system to the firing mechanism): to provide absolute position feedback of the azimuth and/or elevation angular planes for precise ordnance delivery
- **Fire control systems** (i.e., weapon systems on military vehicles or vessels): to provide absolute position feedback of the azimuth and/or elevation angular planes for precise ordnance delivery
- **Gimbals position feedback** (i.e., communication pedestals positioned on top of military vehicles): to provide absolute position feedback of the azimuth and/or elevation angular planes for a continuous communication stream
- **Infrared systems** (i.e., military vehicle infrared systems): may accurately aim the infrared system at the target
- **Engines/transmissions:** to monitor transmission position to maximize fuel efficiency
- **Test equipment:** to provide absolute position feedback to test optical/magnetic encoders, potentiometers and related position sensors

Aerospace

- **Satellite, space station or space vehicle solar panel array:** to position the equipment for maximum solar energy extrusion
- **Satellite antennae:** to position the satellite antennae for signal transmission

Table 1. Operating Characteristics (At 25 °C [77 °F].)

Characteristic	Parameter
Speed	1X
Excitation voltage range	2 V to 15 V
Excitation frequency range	2000 Hz to 5000 Hz
Input current	160 mA max.
Input power	1.30 W max.
Electrical load	30 kOhm min.
Phase shift	40° max.
Accuracy	±7 arcmin
Angular range	360°+
Transformation ratio	0.45 or 1.0
Operating temp. range	-50.8 °C to 93.3 °C [-60 °F to 200 °F]

Table 2. Mechanical Characteristics (At 25 °C [77 °F].)

Characteristic	Parameter
Mounting concentricity	<0.0005 in
Primary winding	rotor
Friction torque	≤0.5 oz in
Shaft runout	≤0.0015 TIR*
Shaft radial play	≤0.0006 in with 4 oz load
Shaft end play	≤0.0005 in with 8 oz load
Weight	<5 oz

Note:

*TIR stands for Total Indicator Runout.

1-Inch Series, Fully-Housed Configuration

Table 3. Environmental Characteristics

Characteristic	Parameter
Vibration	MIL-S-81963B, Section 3.7.1, 15 g, 10 Hz to 2000 Hz, 4 h each on 3 axes
Shock	MIL-S-81963B, Section 3.7.2, 50 g, 11 ms duration, 3 axes, 2 directions, 5 impacts each axis/direction, 30 total
Storage temp.	MIL-STD-810G, 501.5 and 502.5, -50.8 °C to 93.3 °C
Humidity cycle	MIL-STD-202 G Condition 106
Thermal cycle	RTCA/DO-160D Section 5, -50.8 °C to 93.3 °C extreme temperatures, 100 °C, 10 °C per minute transition
Sealing	IP64 NEMA
EMC	MIL-STD-461 RS-101, RE-101, RE-102
Outgassing	SP-R0022 (NASA outgassing requirements)
Material:	
Housing	416 stainless steel
Shaft	303 stainless steel

Figure 1. Electrical Schematic (Positive Direction of Rotation Clockwise, Viewed from Shaft End)



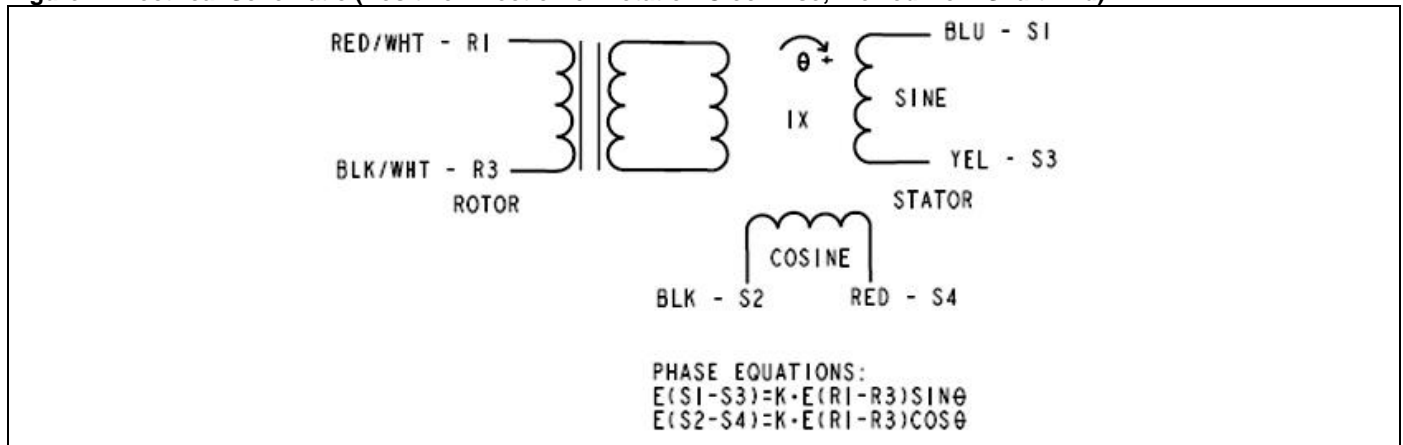


Figure 2. Housed Resolver with Bearing/Shaft Dimensions (For reference only. in.)

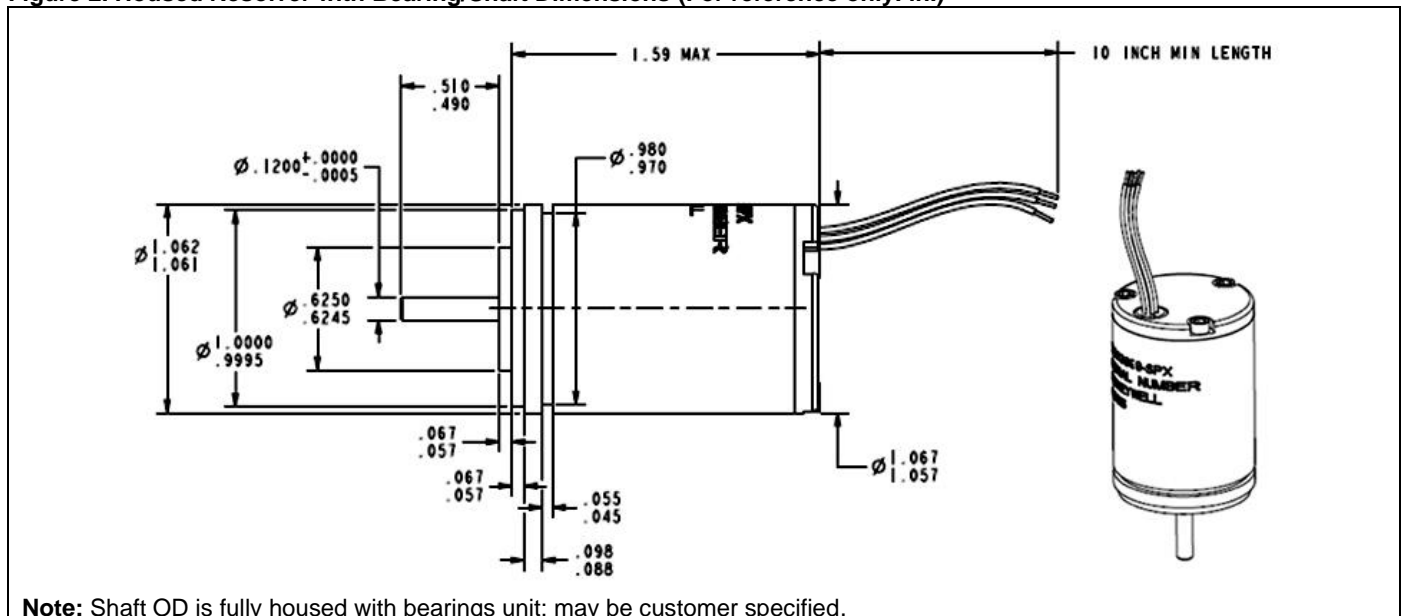

Nomenclature Tree

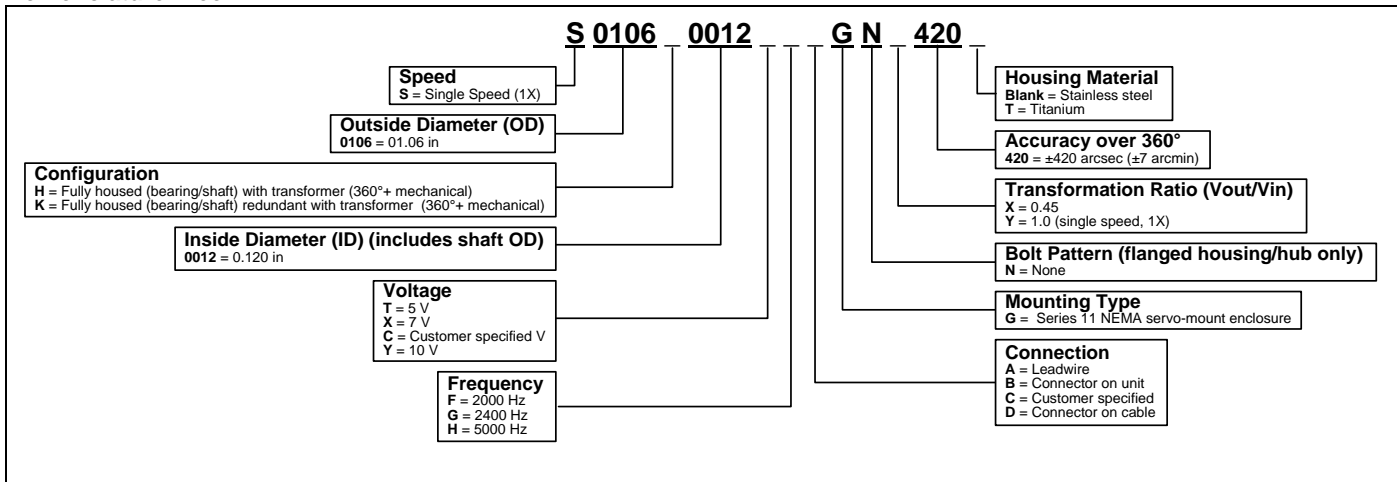

Order Guide

Catalog Listing	Description
S0106H0012XHAGNY420	Honeywell Hawk™ 1-Inch Series Resolvers, single speed, 1.06 in OD, fully housed with transformer, 0.120 in shaft OD, 7 V, 5000 Hz, leadwire, series 11 NEMA servo-mount enclosure, no bolt pattern, 1.0 transformation ratio, ±7 arcmin accuracy, stainless steel housing
S0106H0012XHAGNX420	Honeywell Hawk™ 1-Inch Series Resolvers, single speed, 1.06 in OD, fully housed with transformer, 0.120 in shaft OD, 7 V, 5000 Hz, leadwire, series 11 NEMA servo-mount enclosure, no bolt pattern, 0.45 transformation ratio, ±7 arcmin accuracy, stainless steel housing

⚠ WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury. Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

⚠ WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific +65 6355-2828
+65 6445-3033 Fax
Europe +44 (0) 1698 481481
+44 (0) 1698 481676 Fax
Latin America +1-305-805-8188
+1-305-883-8257 Fax
USA/Canada +1-800-537-6945
+1-815-235-6847
+1-815-235-6545 Fax

Sensing and Control

Honeywell

1985 Douglas Drive North

Golden Valley, MN 55422

www.honeywell.com/sensing

000699-2-EN IL50 GLO Printed in USA

March 2011

Copyright © 2011 Honeywell International Inc. All rights reserved.

Honeywell

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[S0106H0012XHAGNX420](#) [S0106H0012XHAGNY420](#)