
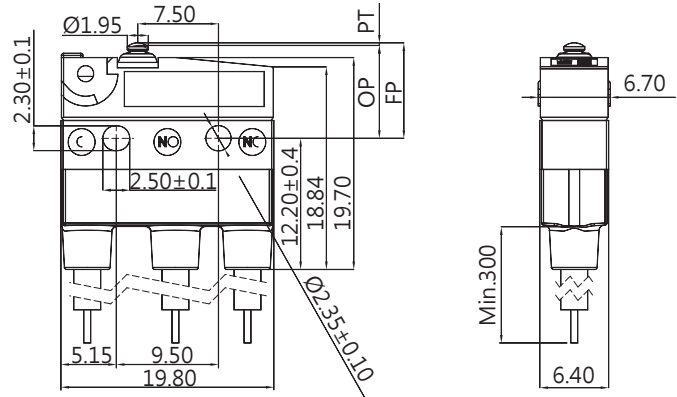


# WATER PROOF SWITCHES

## DIMENSIONS

Unless otherwise specified, a tolerance of  $\pm 0.4\text{mm}$  applies to all dimensions.

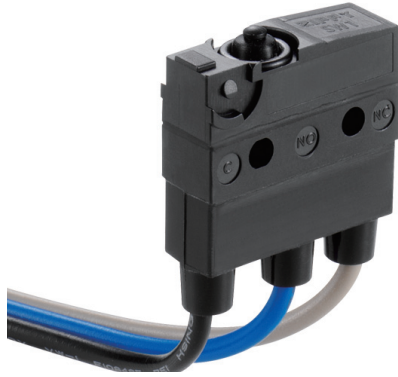

## SW1 (IP67) SERIES

### APPLICATIONS

Telephone, Air conditioner, Computer, Humidifier, Alarm, Time recorder, Mixer & Chopper, Solder gun, Neon phone, Fax machine, Joystick, Water pump, Gas detector, Pencil sharpener, Money sorter, Food processor, Electric knife, Toy car, Juice maker, Electric steak pan.

### THE SELECTION OF RATING & FORCE

MODEL	Rating	D	L	S	H
SW1	0.1A	*	*	*	*
	6 A			*	*
	10A			*	*
	12A				*

NOTE : The Symbol " \* " to represent the result is accepted

### ORDERING INFORMATION

SERIES PREFIX	RATING CURRENT	OPERATING FORCE	COVER TYPE	ACTUATOR TYPE	TERMINAL TYPE	CIRCUIT ARRANGEMENT	AWG TYPE	UL NUMBER	SERIAL CODE	ROHS CODE
SW1	P1 0.1A 125/250 VAC	H HEAVIER	1	00	A	0 S.P.D.T	E 20	A UL1007		
	06 6A 125/250 VAC	S STANDARD		01	B	1 S.P.S.T NO	F 22	B UL1015		
	10 10A 125/250 VAC	L LIGHT		02	C	2 S.P.S.T NC	G 24	C UL1430		
	12 12A 125/250 VAC	D SLIGHT		03	D		H 26			

#NOTE				
ITEM	RATING CURRENT	OPERATION FORCE	AWG TYPE	LEADS WIRE
1	Code:P1	All	All	Min.30cm
2	Code:06	H,S	20,22	Min.30cm
3	Code:10	H,S	20,22	Min.30cm
4	Code:12	H	20	Min.30cm

### CERTIFICATE INFORMATION

Model Name	UL · cUL	ENEC
SW1-P1	0.1RA 30VDC $\mu$ T55 1E4	0.1A 30VDC $\mu$ T55 1E4
	0.1RA 125/250VAC $\mu$ T55 1E4	0.1A 125/250VAC $\mu$ T55 1E4
SW1-06	5RA 30VDC $\mu$ T55 1E4	5A 30VDC $\mu$ T55 1E4
	6RA 125/250VAC $\mu$ T55 1E4	6A 125/250VAC $\mu$ T55 1E4
SW1-10	5RA 30VDC $\mu$ T55 1E4	5A 30VDC $\mu$ T55 1E4
	10RA 125/250VAC $\mu$ T55 1E4	10A 125/250VAC $\mu$ T55 1E4
SW1-12	5RA 30VDC $\mu$ T55 1E4	5A 30VDC $\mu$ T55 1E4
	12RA 12GPA 125/250VAC $\mu$ T55 1E4	12A 125/250VAC $\mu$ T55 1E4